



FEATURES

- 12-inch loaded deck height for tall loads
- Low-profile design offers clearance
- 5 ride height positions for deck height options
- 13HP power unit in the base of the gooseneck
- 11-foot long hydraulic neck for fast loading
- Full-width platform adds loading space
- 12 d-rings provide tie-down locations



RUGGED & VERSATILE MAIN DECK


XL HDG Mini-decks feature a 12-inch loaded deck height with 4 inches of ground clearance. XL Mini-decks are available in capacities from 60,000 pounds to 80,000 pounds. They come in both 48-foot long and 53-foot long - with either 28 feet or 33 feet in the well, respectively.

UNIQUE THREE BEAM DESIGN

XL's superior three beam design uses 4-inch junior I-beams on 18" -inch centers, resulting in a lighter yet exceptionally strong trailer. With empty base weights as low as 19,650 pounds, drivers can easily scale out to maximum payload. This design uses steel flooring in the center deck and Apitong in the outer bays.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

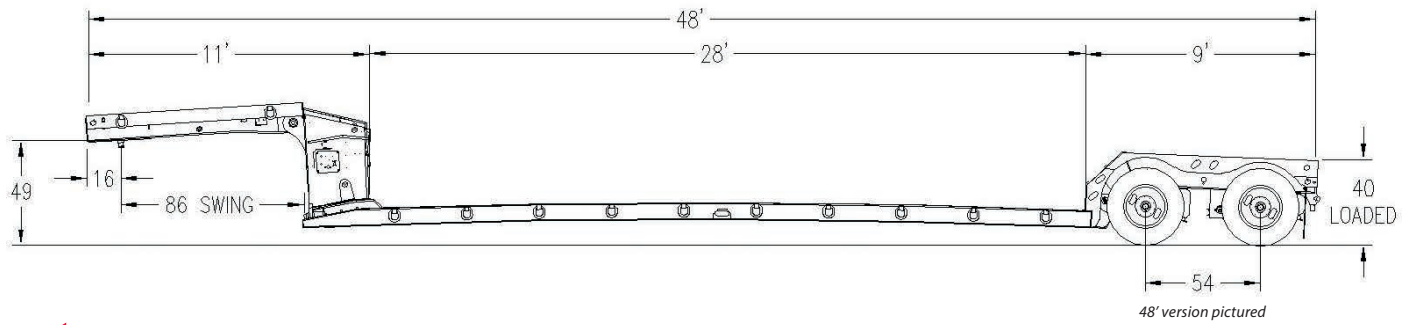

XL 60, 70 & 80 HDG: MINI-DECK

XL 60 HDG: MINI CAPACITY

capacity: 60,000 lb overall
concentrated: 60,000 lb in 16'

XL 70 HDG: MINI CAPACITY

capacity: 70,000 lb overall
concentrated: 70,000 lb in 16'

XL 80 HDG: MINI CAPACITY

capacity: 80,000 lb overall
concentrated: 80,000 lb in 16'

OVERALL LENGTH & WIDTH

overall length: 48' or 53'
overall width: 102"

GOOSENECK

hydraulic low-profile full-width
11' long
49" 5th wheel height
86" swing clearance
16" king pin setting
(2) bent d-rings per side
1 1/8" Apitong decking - flush
13HP power unit with steel cover
frame reinforcement for flip neck

GOOSENECK OPTIONS

pan style d-rings
36" flip neck extension

MAIN DECK

48' version: 28' long
53' version: 33' long
T-1 flange, 80K web
(2) 8" fabricated i-beams
center box beam
12" loaded deck height
4" ground clearance
4" jr i-beam cross members
on 18" centers
80 only: mid-header
12 bent d-rings per side
1 1/8" Apitong decking - flush
in outer bays
steel floor in center deck
ramp tapers to 4"

MAIN DECK OPTIONS

1 3/8" Apitong decking - raised
additional clearance lights
4-way plug(s)
chain drops
additional d-rings
Durabek non-slip on center deck

REAR BRIDGE

9' long
40" deck height
1 1/8" Apitong decking flush
2 flag holders
2 bent d-rings in tail channel
2 pair pan-style d-rings, on corners
frame reinforcement for flip axle

REAR BRIDGE OPTIONS

clearance lights
pull out lights
4" amber strobe tail light
additional tail light
battery back up
(1) 4-way plug
1 3/8" Apitong decking - raised
dock bumpers

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

liquid filled air gauge
Air-weigh digital scale
control in aluminum box - ball valves
electric dump valve with 4-way plug
and wire

AXLES

(2) 25,000 lb nominal
hub pilot, outboard drums
4S2M ABS
16 1/2" x 7" brakes
(2) pair spring brakes

AXLE OPTIONS

PSI tire inflation system
hubometer
TP axles (same inner & outer bearings)

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels
(outside)
Michelin 255/70R/22.5 tires

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 60 HDG: Mini-deck
XL 70 HDG: Mini-deck
XL 80 HDG: Mini-deck

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852