



XL STEP DECK: T-SERIES



FEATURES

- 1 1/8-inch flush Apitong decking is stronger than Oak
- 3-inch channel crossmembers on 16-inch centers
- available with 48-foot or 53-foot overall length
- built to last, using T-1 flange and 80K webs
- 3/8" x 2" rub rail with single pipe spools
- stake pockets on 24" centers
- knee braces on 48" centers
- mill channel side rails



VERSATILE AXLE OPTIONS

The XL SD: T-Series is available with four axle-spread options: 49-inch (with spring suspension only), 54-inch, 60-inch or 10-foot 1-inch. Choose from the standard 40 inches loaded deck height, or go to 17.5 tires for a loaded deck height of 36 inches.


BEAVER TAIL

The XL SD: T-Series features a 6-foot long beaver tail with 5-foot 8-inch spring assist ramps. Use the beaver tail and ramps to load equipment faster. Add wood to your ramps for added strength and traction. A third center deck option is also available to add to your beaver tail.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

XL 60 SD T-SERIES SPECS

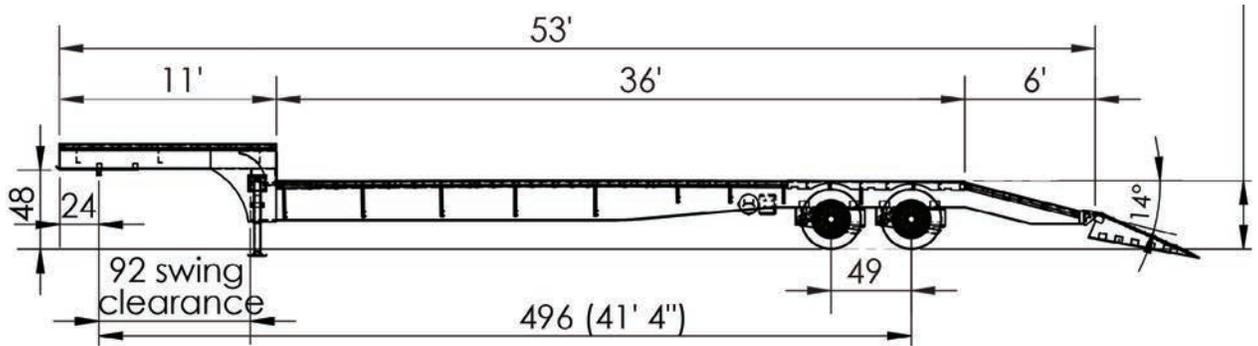

CAPACITY

capacity: 60,000 lb overall

OVERALL LENGTH & WIDTH

overall length: 53'

overall width: 102"

GOOSENECK

11' long

24" king pin setting & 86" swing

48" fifth wheel height

1 1/8" apitong decking

2 speed landing gear

stake pockets on 24" centers

3/8" x 2" rub rail with
single pipe spools

MAIN DECK

36' long

T-1 flange, 80K web

40" loaded deck height

1 1/8" Apitong decking flush

3" channel crossmembers

on 16" centers

mill channel side beams

stake pockets on 24" centers

3/8" x 2" rub rail with
single pipe spools

knee braces on 48" centers

2 tool boxes (12" x 12" x 48")

6' beaver tail

5' 8" spring assist ramps

MAIN DECK OPTIONS

no beavertail

aluminum toolbox 18" x 18" x 48"

traction over wheels

additional 2" side clearance lights

amber strobe tail lights

sliding winch track, driverside

sliding winch track, curbside

sliding winches, driverside

manual dump valve

wood on ramps

(only available with beaver tail)

3rd load ramp

(only available with beaver tail)

4" i-beams in lieu of 3" channel

c-channel on ramps

formed step on front

SUSPENSION

25,000 lb air ride

AXLES

(2) 25,000 lb dexter

77 1/2" tracking

2S1M spring brakes on 1 axle

161/2" x 7" brakes

hub pilot, outboard drums

AXLE OPTIONS

49" axle spacing

54" axle spacing

60" axle spacing

10' 1" axle spacing

PSI tire inflation system

WHEELS & TIRES

8.25 x 22.5 steel rims

255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

weld-on mount for spare tire

bolt-on mount for spare tire

aluminum wheels (inside)

aluminum wheels (outside)

235/70R/17.5 tires (36" deck height)

spare 255 tire and steel wheel

spare 235 tire and steel wheel

LIGHTING

sealed wiring harness

rubber mounted LED lights

2 tail light package

PAINT

black, IH red, CAT yellow

air & electric done after paint

PAINT OPTIONS

non-standard paint colors

non-standard metallic paint

WARRANTY

1 year structural

1 year paint

AVAILABLE MODELS

XL 60 SD

XL 80 SD

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852