



FEATURES

- Foot hole and grab handle for access to upper deck
- 9' pop-up ramp from deck to neck
- 18,000 lb winch with air kickout
- 25,000 lb tail lifting capacity
- Work light at rear of neck
- 2 function wireless remote
- Star traction or steel tread plate



UNIQUE HYDRAULIC TAIL DESIGN


The tail is comprised of two sections – an 8-foot 8-inch platform ramp and a 60-inch flip tail. Both hinge points stay clean thanks to lug style hinges. These hinges prevent debris from accumulating.

HANDLES HARD-TO-LOAD EQUIPMENT

With a load angle of 10 degrees, the hydraulic tail is equipped to easily handle hard-to-load equipment such as manlifts, rollers, forklifts and paving equipment. The tail features a lifting capacity of 25,000 pounds for loads centered on the main platform.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

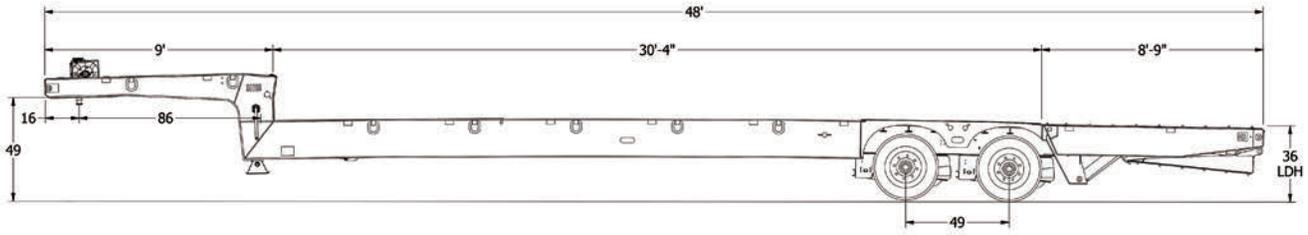

XL POWER TAIL SPECS

CAPACITY

capacity: 80,000 lb overall
concentrated: 50,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 48' or 53'
overall width: 102"

GOOSENECK

9' long full-width
90° slope
16" king pin setting
86" swing clearance
49" 5th wheel height
steel tread plate decking
(2) d-rings per side
2 speed landing gear with handle
on driver side
wet line hydraulics to run off truck
hydraulic levers on driver side
planetary drive 18,000 lb hydraulic
winch with 75' of 1/2" cable
& air kick out
2 function wireless remote
for winch
2 toolboxes with lids
9' long pop-up ramp, deck to neck
integrated foot step and grab
handle, on both sides

GOOSENECK OPTIONS

13HP honda power unit
no pop-up ramp
30,000 lb winch
20,000 lb winch
12,000 lb winch
work-around pulley for winch cable
bolt-on winch guard
8 function wireless remote
10 function wireless remote

MAIN DECK

T-1 flange, 80k web
48' OAL: 30' 4" long
53' OAL: 35' 4" long
36" loaded deck height
1 3/8" Apitong decking - raised

1/4" tread plate covered wheels
18" fabricated i-beams
10" & 8" jr. i-beam cross members on
alternating 12" centers
5 d-rings per side
stake pockets and chain slots
on alternating 24" centers, sides
chain slots down on 48" centers,
center deck
2 pairs of flag holders

MAIN DECK OPTIONS

double drop design
additional d-rings

TAIL SECTION

13' 8" hydraulic tail:
8' 8" platform
60" fold under flip tail
automatic flip tail lock
traction aids
star traction plate decking

TAIL SECTION OPTIONS

tread plate decking

WHEELS & TIRES

6.75 x 17.5 steel rims
245 / 70R / 17.5 tires

WHEEL & TIRE OPTIONS

255 tires changes rear
deck height to 39"
aluminum mill wheels
aluminum polished wheels
customer specified tires
customer specified mud flaps
Michelin tires
PSI tire inflation system

SUSPENSION

25,000 lb air ride

SUSPENSION OPTIONS

liquid filled air gauge
Air-weigh digital scale

AXLES

(2) 25,000 lb nominal
49" axle spacing
hub pilot, outboard drums
4S2M ABS
spring brakes on 2 axles
12 1/4" x 7 1/2" brakes
auto slack adjusters
air dump on both axles

AXLE OPTIONS

hubometer
TP axles (same inner & outer bearings)
dust shields
cat eye systems
disc brakes

LIGHTING

12V sealed grote harness
rubber mounted led lights
3 tail light package
1 mid-turn signal per side
2 clearance light per side
7 pole electrical socket

LIGHTING OPTIONS

amber strobe as 3rd tail light
extra clearance lights

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 80 PT

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852